


## Finale Funktionsprüfung / Final Functional Test

- Detector-Modus: Laser-Empfänger reagiert.
- Vertikale Linie lotrecht.

## Gerät kippen

- Laserlinien blinken
- Warnton
- Tilt-Modus

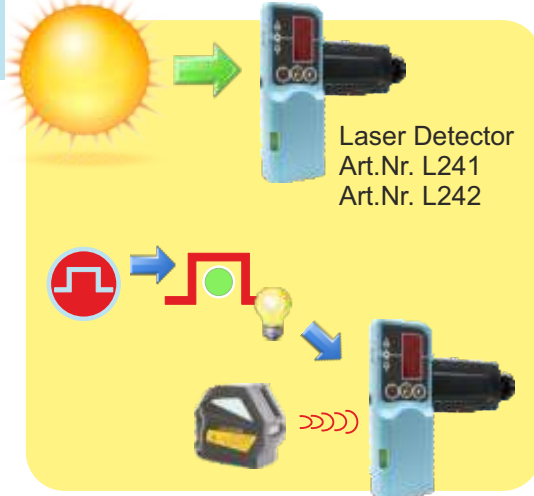

### Specifications

	L1	L1G
Self leveling range	3°	3°
Working radius	15 m	20 m
Working radius detector	50 m	50 m
Laser class	2	2
Laser diode	635 nm	532 nm
Accuracy	3 mm / 10 m	3 mm / 10 m
Guaranty	2 years	2 years

Stempel Prüfer

# hedue®

## L1 / L1G

Art.Nr. L216 / L219

# Quick Start



10014

