

Rotary laser HEDÜ R2

With red or green laser beam



Rotary laser HEDÜ R2
starting
from € **690,-**

Elevator tripod 0,75 to 2,86 m
Art.-No. 1085
Just € **99,-**

- Horizontal
- Vertical
- Self levelling
- Plumb line beam (2 fold)
- Tilt mode
- Inclination mode
- Line mode
- Remote control
- Laser receiver
- Accumulator
- Charger
- Test certificate



All you need in the HEDÜ R2:

- ✓ Full automatic alignment in a horizontal and vertical level
- ✓ Modes point, line and rotation.
- ✓ Manual rise and decline of the x and y axis via remote control up to 5° (inclination mode)
- ✓ High performance laser receptor for an **working range up to 500m**
- ✓ Two reference beams (coming off up and below) for plumbing and lining up the partition walls.
- ✓ 360° reception range of the remote control because of four receive modules in the head of the rotary laser.
- ✓ Tilt mode for big construction sites.
- ✓ All functions are steered by 9 buttons of the remote control.
- ✓ Rain protected case.
- ✓ Calibration certification


Red or green laser beam? Green laser lines are visible much better than red laser lines. A valuable plus for the interior work. However you mostly use a laser receiver, e.g. outside the R2 with the red laser is then the right choice.

HEDÜ R2 red laser beam
Art.-No. R171
Just € **690,-**

HEDÜ R2 green laser beam
Art.-No. R176
Just € **980,-**

Your R2 is delivered so completely :

Every HEDÜ R2 is delivered with charger, batteries, remote control, laser receiver, case and inspection certificat.

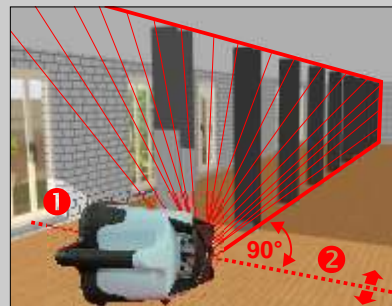

The vertical operation facilitate the two reference beams ① and ② lining partition walls up quite considerably. The installation angle can precisely be adjusted with the remote control.

Technical data for the rotation laser HEDÜ R2

R2 red laser beam; R2 green laser beam

| | |
|---------------------------------------|-----------------------------------|
| Working radius with detector | 500 m |
| Laser class | II; 3R |
| Laser diode | 635 nm, 1 mW; 532 nm, 1 m |
| Plumb line beam | yes, 2fold (up and below) |
| Point and laser mode | yes, with remote control |
| Head protection | yes |
| Self levelling | horizontal and vertical |
| Precision horizontal and vertical | 1 mm at 10 m |
| Self levelling range | 5° |
| Inclination mode, manual | X- und Y-Axis with remote control |
| Wideness of the laser line at 5 m | 4 mm; 2 mm |
| Tilt alarm | yes |
| Battery working hours | 20 hours; 15 hours |
| Rain and dust protection | yes, Ip54 |
| Rotation speed | 0, 60, 120, 300, 600 U/min. |
| Reception area of the remote control | 20 m |
| Reception angle of the remote control | 360° (4 receptors) |
| Tripod socket horizontal | 5/8" |
| Working temperature | -20°C - +50°C; -5°C - +45°C |
| Guarantee | one year |
| Weight | 2,0 kg |