

Hedue PL2 positioning laser with red laser cross

Freely focusable positioning laser with cross optics and 50 mW power

The positioning laser simplifies the alignment of workpieces on machines or work tables. Power is supplied via a power supply unit. The laser is protected against overvoltage. The freely focusable optics allow it to be mounted at any distance from the object.



With cross optics




Surge/spike protection against overvoltage



The housing is electrically insulated

Features

- **With cross optics**
- **Freely focusable**
- **Power supply unit with high noise immunity**
- **Surge/spike protection against overvoltage**
- **The housing is electrically insulated**

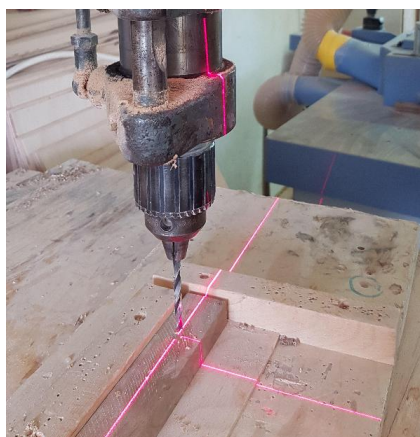

Freely focusable



Power supply unit with high noise immunity

Specifications

Weight	70 g
Warranty / Months	24
Dimensions	80 x 20 mm
Line length/mounting distance	2,00 m / 1 m
Line width	1 mm
Laser class	3R
Laser Diode	635 nm

Laserfarbe	rot
Lifetime of the laser diode in hours	10.000 h
Performance	50 mW
IP protection class	IP54
Power plug	Typ C
Power supply	5 V
EAN	4012589763210

Scope of Delivery

- Positioning laser PL2
- Power supply unit for positioning laser PL2
- Without holder